


OFW - Top yarn detector


The top yarn detector is the first yarn monitoring point after the bobbin on the path to the knitting machine. It can be installed on conventional bobbin stands above the bobbins or on the side creels. The upper yarn detector not only detects yarn breaks but will also detect snatching or jamming of the yarn. This feature prevents yarn breakages.

Top detector OFW
12 V, 100 Ohm, or 24 V
Diode

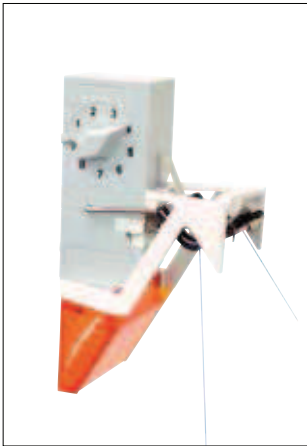

Top detector OFW
12 V, 1,2 kOhm, or 24 V
Diode


for installation to the tube duct
at the tube input

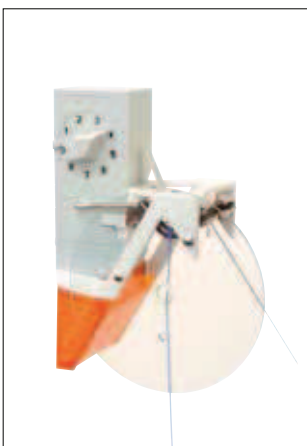

NW - Needle detector

The needle detector detects closed needle latches, broken needles and fabric waste caused by broken needle latches.

Needle detector NW
straight

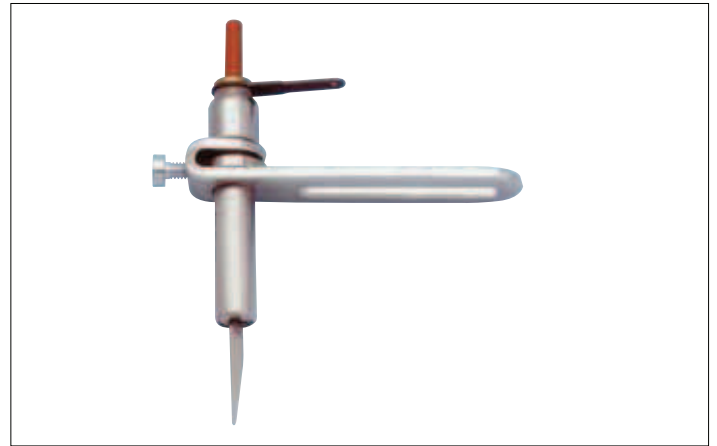

Needle detector NW
bent

